

# THEFT RESISTANT HARDWARE



**BREAK-A-WAY NUT**  
5/16"



**TUFNUT** Aluminum Break-a-Way Nut is screwed onto 5/16" bolt in usual way.

When nut is tightened securely, hex part breaks away from self-locking unit.


Each self-locking nut is vandal-pruf. It can be removed by a secret method.

## Here's How It Works

Tufnut security nuts should be used with a standard **CARRIAGE BOLT**, or our special round headed **TUFBOLT™** security bolt, which can be used on drilled metal surfaces.

A. Install TUFNUT™ #1 finger tight.

B. Install TUFNUT™ #2 so it's a half turn (½ turn) from #1 and tighten or loosen by inserting wrench or vicegrip between TUFNUTS™ then turning both nuts.

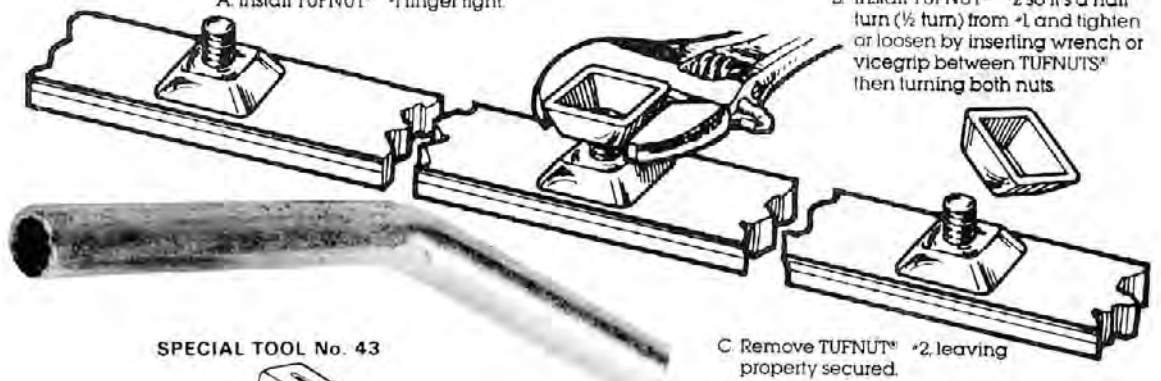

C. Remove TUFNUT™ #2, leaving property secured.

SPECIAL TOOL No. 43



SPECIAL TOOL No. 73



**NO. BHP76 FOR "U" POSTS AND BRACKETS**




**TAMPER PRUF BOLTS WITH FLUTED NUTS**





5/16" x 2" & 2 1/2"  
Hex Head plated nuts & bolts  
(Full thread)

## POP RIVETS

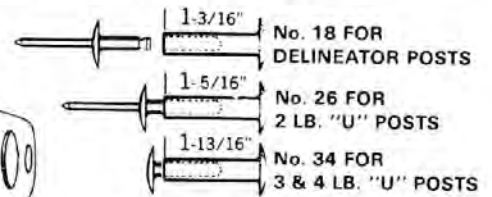


No. 18 FOR  
DELINEATOR POSTS  
No. 26 FOR  
2 LB. "U" POSTS  
No. 34 FOR  
3 & 4 LB. "U" POSTS

**CHERRY-MATE RIVETS & GUNS**

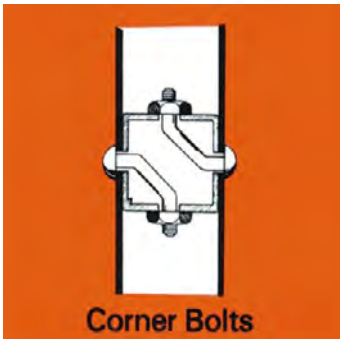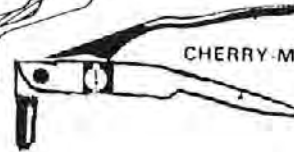

**Corner Bolts**

**SET SCREWS WITH CENTER PIN**

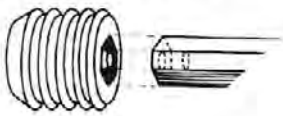


**NO. PRP38**

**VANDAL-PRUF ALUMINUM BOLT SHOULDER STOPS SIGNS FROM WIGGLING**



**NO. VPA12**

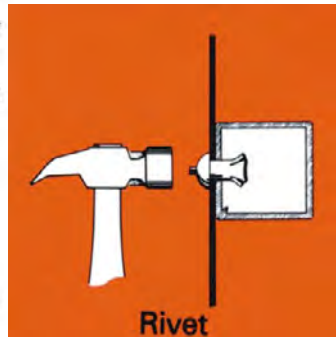

**Rivet**



**SPECIAL TOOL No. 2**